


4 Leg Slings

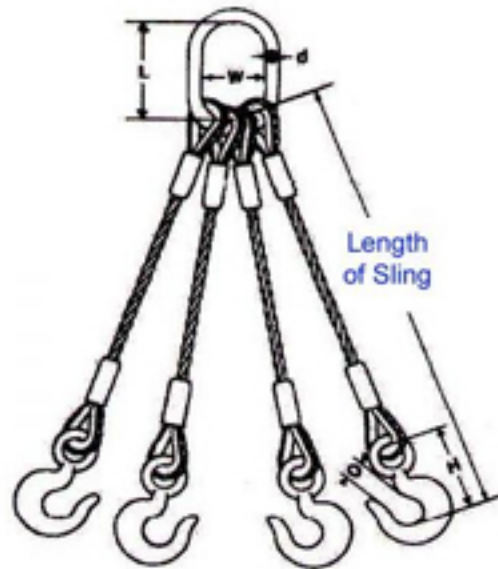

Classification	Rope Diameter (in.)	EIPS Capacities in Tons			Alloy Oblong Link (in.)	Eye Hook (Tons)	Minimum Sling Length
		Horizontal	Angle With	Horizontal			
		30	45	60			
6 x 19	1/4	1.3	1.8	2.2	5/8	3/4 - C	1' 3"
	3/8	2.9	4.1	5	1	1 1/2 - C	1' 8"
	1/2	5.1	7.1	8.8	1 1/4	3 - C	2' 0"
	5/8	7.8	11	14	1 1/2	5 - A	2' 4"
	3/4	11	16	19	1 1/2	7 - A	2' 9"
	7/8	15	21	26	1 3/4	11 - A	3' 3"
6 x 37	1	20	28	34	2	11 - A	3' 6"
	1 1/8	24	34	42	2 3/4	15 - A	4' 0"
	1 1/4	30	42	51	2 3/4	15 - A	4' 6"
	1 3/8	36	50	62	3 1/2	22 - A	5' 0"
	1 1/2	42	60	73	3 1/2	22 - A	5' 6"
	1 3/4	57	80	98	3	30 - A	6' 6"
	2	73	104	127	3 3/4	37 - A	8' 9"

ALL MASTER LINKS ARE SIZED TO ACCOMODATE HEAVY DUTY THIMBLES.

IF THIMBLES ARE NOT REQUIRED, A SMALLER MASTER LINK COULD BE APPROPRIATE