


Nylon Slings

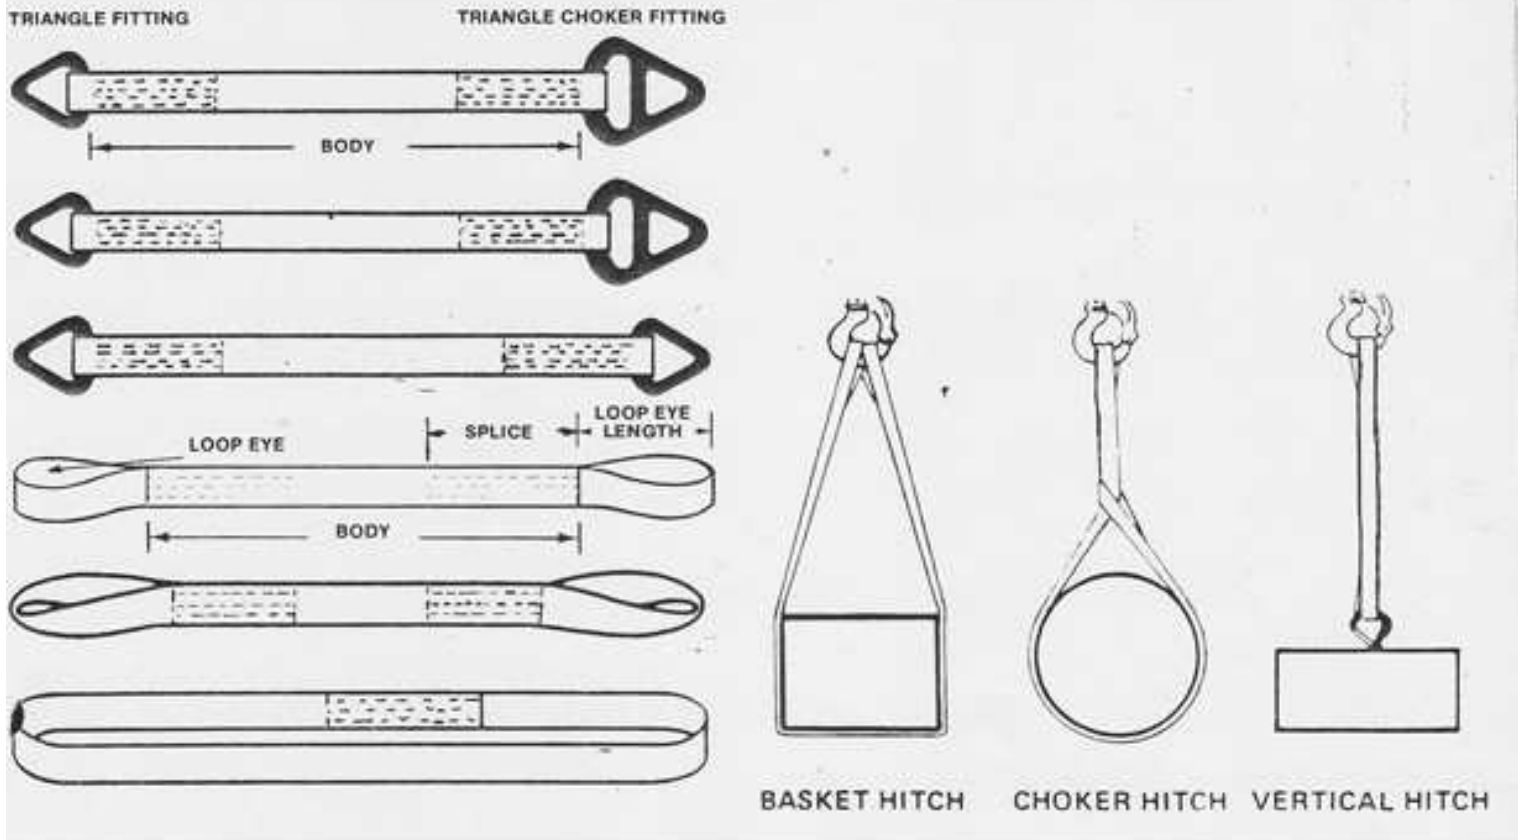

Heavy Duty Slings

Sling Width	Cat No.	Eye Length	Vertical	Basket	Choker
1"	EET-2-901	9"	3,200	6,400	2,600
2"	EET-2-902	9"	6,400	12,800	5,100
3"	EET-2-903	12"	8,900	17,800	7,100
4"	EET-2-904	12"	11,500	23,000	9,200
6"	EET-2-906	15"	16,300	32,600	13,100

Heavy Weight Lifter Slings

Sling Width	Cat No.	Eye Length	Vertical	Basket	Choker
8"	EET-2-908	18"	20,500	41,000	16,400
10"	EET-2-910	18"	24,000	48,000	19,200
12"	EET-2-912	24"	26,900	53,700	21,500

Single Leg Slings




Classification	Rope Diameter (in.)	Single Part Sling Capacity - Tons			Approx. Loop Size (in.)
		Vert.	Choker	Vert. Basket	
6 x 19	1/4	0.65	0.48	1.3	2 x 4
	5/16	1	0.74	2	2 1/2 x 5
	3/8	1.4	1.1	2.9	3 x 6
	7/16	1.9	1.4	3.9	3 1/2 x 7
	1/2	2.5	1.9	5.1	4 x 8
	9/16	3.2	2.4	6.4	4 1/2 x 9
	5/8	3.9	2.9	7.8	5 x 10
	3/4	5.6	4.1	11	6 x 12
	7/8	7.6	5.6	15	7 x 14
6 x 37	1	9.8	7.2	20	8 x 16
	1 1/8	12	9.1	24	9 x 18
	1 1/4	15	11	30	10 x 20
	1 3/8	18	13	36	11 x 22
	1 1/2	21	16	42	12 x 24
	1 5/8	24	18	49	13 x 26
	1 3/4	28	21	57	14 x 28
	2	37	28	73	16 x 32

ALL MASTER LINKS ARE SIZED TO ACCOMODATE HEAVY DUTY THIMBLES.

IF THIMBLES ARE NOT REQUIRED, A SMALLER MASTER LINK COULD BE APPROPRIATE

2 Leg Slings

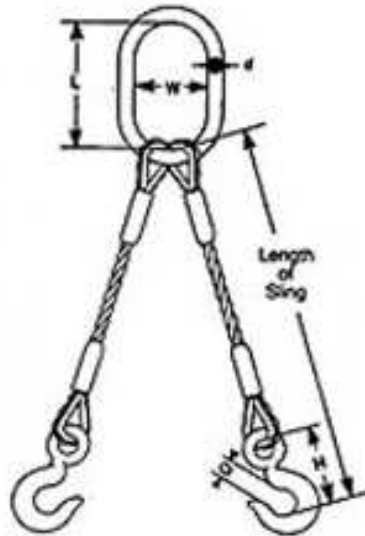

Classification	Rope Diameter (in.)	EIPS Capacities in Tons Angle With Horizontal			Alloy Oblong Link (in.)	Eye Hook (Tons)	Minimum Sling Length
		30	45	60			
6 x 19	1/4	0.65	0.91	1.1	1/2	3/4 - C	1' 3"
	3/8	1.4	2	2.5	5/8	1 1/2 - C	1' 8"
	1/2	2.5	3.6	4.4	7/8	3 - C	2' 0"
	5/8	3.9	5.5	6.8	1	5 - A	2' 4"
	3/4	5.6	7.9	9.7	1 1/8	7 - A	2' 9"
	7/8	7.6	11	13	1 1/4	11 - A	3' 3"
6 x 37	1	9.8	14	17	1 3/4	11 - A	3' 6"
	1 1/8	12	17	21	1 3/4	15 - A	4' 0"
	1 1/4	15	21	26	2	15 - A	4' 6"
	1 3/8	18	25	31	2	22 - A	5' 0"
	1 1/2	21	30	37	2 1/2	22 - A	5' 6"
	1 3/4	28	40	49	2 3/4	30 - A	6' 6"
	2	37	52	63	3	37 - A	8' 9"

**ALL MASTER LINKS ARE SIZED TO ACCOMODATE HEAVY DUTY THIMBLES.
IF THIMBLES ARE NOT REQUIRED, A SMALLER MASTER LINK COULD BE APPROPRIATE**


3 Leg Slings



Classification	Rope Diameter (in.)	EIPS Capacities in Tons			Alloy Oblong Link (in.)	Eye Hook (Tons)	Minimum Sling Length
		Horizontal					
		30	45	60			
6 x 19	1/4	0.97	1.4	1.7	5/8	3/4 - C	1' 3"
	3/8	2.2	3	3.7	3/4	1 1/2 - C	1' 8"
	1/2	3.8	5.4	6.6	1	3 - C	2' 0"
	5/8	5.9	8.3	10	1 1/2	5 - A	2' 4"
	3/4	8.4	12	15	1 1/2	7 - A	2' 9"
	7/8	11	16	20	1 3/4	11 - A	3' 3"
6 x 37	1	15	21	26	2	11 - A	3' 6"
	1 1/8	18	26	31	2 1/4	15 - A	4' 0"
	1 1/4	22	31	38	2 1/2	15 - A	4' 6"
	1 3/8	27	38	46	3	22 - A	5' 0"
	1 1/2	32	45	55	3 1/4	22 - A	5' 6"
	1 3/4	42	60	74	3 3/4	30 - A	6' 6"
	2	55	78	95	4 1/4	37 - A	8' 9"

**ALL MASTER LINKS ARE SIZED TO ACCOMODATE HEAVY DUTY THIMBLES.
IF THIMBLES ARE NOT REQUIRED, A SMALLER MASTER LINK COULD BE APPROPRIATE**

4 Leg Slings

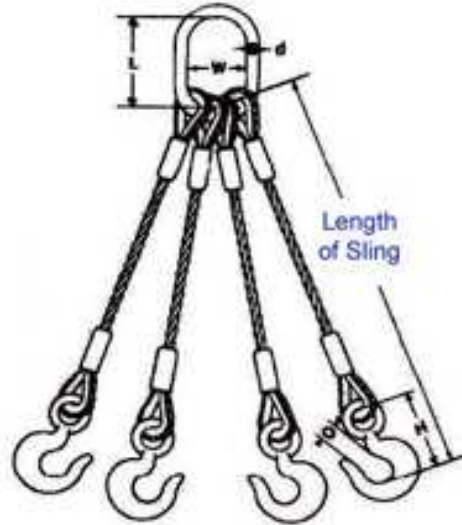


Classification	Rope Diameter (in.)	EIPS Capacities in Tons			Alloy Oblong Link (in.)	Eye Hook (Tons)	Minimum Sling Length
		30	45	60			
6 x 19	1/4	1.3	1.8	2.2	5/8	3/4 - C	1' 3"
	3/8	2.9	4.1	5	1	1 1/2 - C	1' 8"
	1/2	5.1	7.1	8.8	1 1/4	3 - C	2' 0"
	5/8	7.8	11	14	1 1/2	5 - A	2' 4"
	3/4	11	16	19	1 1/2	7 - A	2' 9"
	7/8	15	21	26	1 3/4	11 - A	3' 3"
6 x 37	1	20	28	34	2	11 - A	3' 6"
	1 1/8	24	34	42	2 3/4	15 - A	4' 0"
	1 1/4	30	42	51	2 3/4	15 - A	4' 6"
	1 3/8	36	50	62	3 1/2	22 - A	5' 0"
	1 1/2	42	60	73	3 1/2	22 - A	5' 6"
	1 3/4	57	80	98	3	30 - A	6' 6"
	2	73	104	127	3 3/4	37 - A	8' 9"

ALL MASTER LINKS ARE SIZED TO ACCOMODATE HEAVY DUTY THIMBLES.

IF THIMBLES ARE NOT REQUIRED, A SMALLER MASTER LINK COULD BE APPROPRIATE

Single and Double

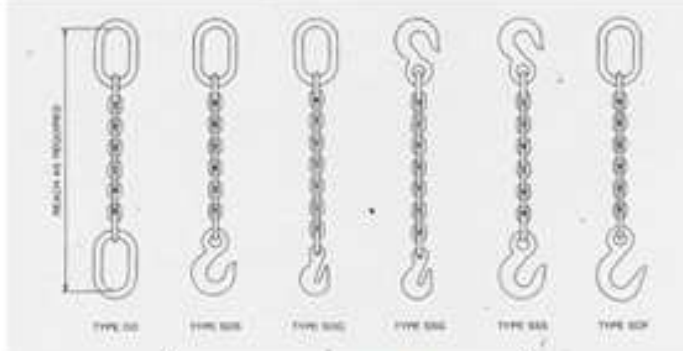

SYMOBLS Single Chain Slings

Type	Attachments	
SOS	Oblong Link	Sling Hook
SPG	Pear Shaped Link	Grab Hook
SOG	Oblong Link	Grab Hook
SGS	Grab Hook	Sling Hook
SGG	Grab Hook	Grab Hook
SSS	Sling Hook	Sling Hook
SPF	Pear Shaped Link	Foundry Hook
SoF	Oblong Link	Foundry Hook
CP	Pear Shaped Link	Pear Shaped Link
CO	Oblong Link	Oblong Link

Chain Size		Oblong Master Link (Inches)			Working Load Limit	
Inches	MM	Nominal Size Material	Inside Width	Inside Length	Lbs.	Kgs.
9/32	7	1/2	2 1/2	5	4,300	1,950
3/8	10	3/4	3	6	8,800	3,990
1/2	13	1	4	8	15,000	6,800
5/8	16	1	4	8	22,600	10,300
3/4	20	1 1/4	4	8	35,300	16,000
7/8	22	1 1/2	5 1/4	10 1/2	42,700	19,400
1	25	1 3/4	6	12	47,700	21,600
1 1/4	32	2	7	14	72,300	32,800

Dimensions are approximate. Single Sling Chains are available in other combinations
WARNING: Do not exceed working load limit.




SYMOBLS Double Chain Slings

Type	Attachments	
DOS	Oblong Master Link Sling Hooks	
DPS	Pear Shaped	
	Master Link	Sling Hooks
DOG	Oblong Master Link	Grab Hooks
DPG	Pear Shaped	
	Master Link	Grab Hooks
DOF	Oblong Master Link	Foundry Hooks
DPF	Pear Shaped	
	Master Link	Foundry Hook

Chain Size		Oblong Master Link (Inches)			Working Load Limits					
Inches	MM	Nominal Size Material	Inside Width	Inside Length	60		45		30	
					Lbs.	Kgs.	Lbs.	Kgs.	Lbs.	Kgs.
9/32	7	1/2	2 1/2	5	7,400	3,400	6,100	2,700	4,300	1,950
3/8	10	3/4	3	6	15,200	6,900	12,400	6,900	8,800	3,990
1/2	13	1	4	8	28,000	11,800	21,200	9,600	15,000	6,800
5/8	16	1 1/4	4	8	39,100	17,700	32,000	14,500	22,600	10,300
3/4	20	1 1/2	5 1/4	10 1/2	61,100	27,700	49,900	22,600	35,300	16,000
7/8	22	1 3/4	6	12	74,000	33,500	60,400	27,350	42,700	19,400
1	25	2	7	14	82,000	37,900	67,400	31,000	47,700	21,600
1 1/4	32	2 1/4	8	16	125,200	56,800	102,200	46,400	72,300	32,800

Dimensions are approximate. Double Sling Chains are available in other combinations
WARNING: Do not exceed working load limit.

Triple and Quadruple

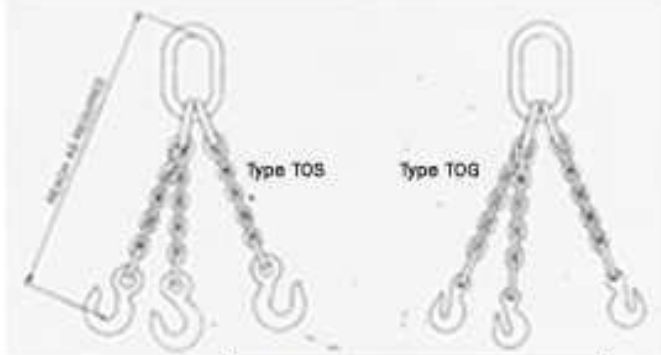


SYMBOLS Triple Chain Slings

Type	Attachments	
TOS	Oblong Master Link	Sling Hooks
TOG	Oblong Master Link	Grab Hooks
TOF	Oblong Master Link	Foundry Hooks

Chain Size		Oblong Master Link (Inches)			Working Load Limits					
		Nominal Size Material	Inside Width	Inside Length	60		45		30	
Inches	MM				Lbs.	Kgs.	Lbs.	Kgs.	Lbs.	Kgs.
9/32	7	13/16	3	6	11,200	5,100	9,100	4,100	6,450	2,900
3/8	10	1 1/8	4	8	22,800	10,300	18,600	8,400	13,200	6,000
1/2	13	1 1/4	4	8	39,000	17,700	31,800	14,400	22,500	10,200
5/8	16	1 5/8	5 1/4	10 1/2	58,700	26,600	47,900	21,700	33,900	15,400
3/4	20	1 7/8	6	12	91,700	41,600	74,900	3,400	53,000	24,000
7/8	22	2 1/4	8	16	110,900	50,250	90,600	41,050	64,000	29,050
1	25	2 1/4	8	16	123,900	56,900	101,200	46,500	71,500	32,800
1 1/4	32	2 3/4	9	16	187,900	85,200	153,400	69,600	108,400	49,200

Dimensions are approximate. Triple Sling Chains are available in other combinations
WARNING: Do not exceed working load limit.

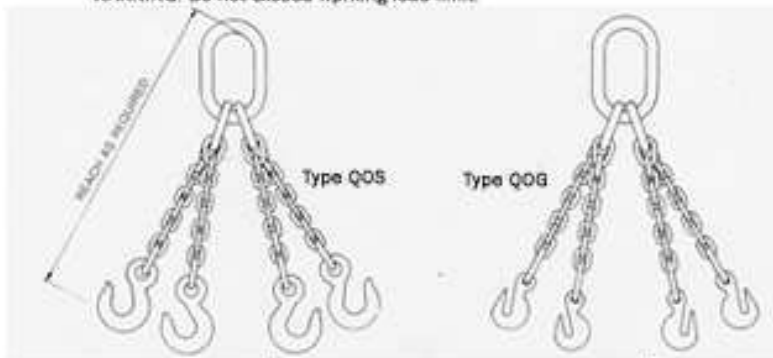

SYMBOLS Quad Chain Slings

Type	Attachments	
QOS	Oblong Master Link	Sling Hooks
QOG	Oblong Master Link	Grab Hooks
QOF	Oblong Master Link	Foundry Hooks

Chain Size		Oblong Master Link (Inches)			Working Load Limits					
		Nominal Size Material	Inside Width	Inside Length	60		45		30	
Inches	MM				Lbs.	Kgs.	Lbs.	Kgs.	Lbs.	Kgs.
9/32	7	13/16	3	6	11,200	5,100	9,100	4,100	6,450	2,900
3/8	10	1 1/8	4	8	22,800	10,300	18,600	8,400	13,200	6,000
1/2	13	1 1/4	4	8	39,000	17,700	31,800	14,400	22,500	10,200
5/8	16	1 5/8	5 1/4	10 1/2	58,700	26,600	47,900	21,700	33,900	15,400
3/4	20	1 7/8	6	12	91,700	41,600	74,900	3,400	53,000	24,000
7/8	22	2 1/4	8	16	110,900	50,250	90,600	41,050	64,000	29,050
1	25	2 1/4	8	16	123,900	56,900	101,200	46,500	71,500	32,800
1 1/4	32	2 3/4	9	16	187,900	85,200	153,400	69,600	108,400	49,200

Dimensions are approximate. Triple Sling Chains are available in other combinations
WARNING: Do not exceed working load limit.