

Triple and Quadruple




SYMBOLS Triple Chain Slings

Type	Attachments	
TOS	Oblong Master Link	Sling Hooks
TOG	Oblong Master Link	Grab Hooks
TOF	Oblong Master Link	Foundry Hooks

Chain Size		Nominal Size Material	Inside Width	Inside Length	Working Load Limits						
					60		45		30		
Inches	MM					Lbs.	Kgs.	Lbs.	Kgs.	Lbs.	Kgs.
9/32	7	13/16	3	6		11,200	5,100	9,100	4,100	6,450	2,900
3/8	10	1 1/8	4	8		22,800	10,300	18,600	8,400	13,200	6,000
1/2	13	1 1/4	4	8		39,000	17,700	31,800	14,400	22,500	10,200
5/8	16	1 5/8	5 1/4	10 1/2		58,700	26,600	47,900	21,700	33,900	15,400
3/4	20	1 7/8	6	12		91,700	41,600	74,900	3,400	53,000	24,000
7/8	22	2 1/4	8	16		110,900	50,250	90,600	41,050	64,000	29,050
1	25	2 1/4	8	16		123,900	56,900	101,200	46,500	71,500	32,800
1 1/4	32	2 3/4	9	16		187,900	85,200	153,400	69,600	108,400	49,200

Dimensions are approximate. Triple Sling Chains are available in other combinations
WARNING: Do not exceed working load limit.

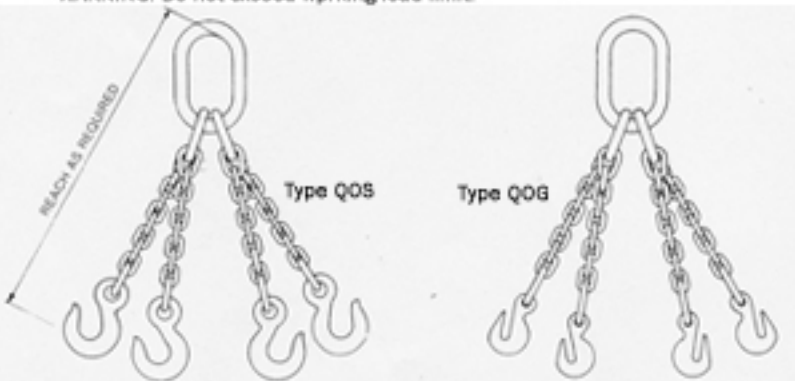

SYMBOLS Quad Chain Slings

Type	Attachments	
QOS	Oblong Master Link	Sling Hooks
QOG	Oblong Master Link	Grab Hooks
QOF	Oblong Master Link	Foundry Hooks

Chain Size		Nominal Size Material	Inside Width	Inside Length	Working Load Limits						
					60		45		30		
Inches	MM					Lbs.	Kgs.	Lbs.	Kgs.	Lbs.	Kgs.
9/32	7	13/16	3	6		11,200	5,100	9,100	4,100	6,450	2,900
3/8	10	1 1/8	4	8		22,800	10,300	18,600	8,400	13,200	6,000
1/2	13	1 1/4	4	8		39,000	17,700	31,800	14,400	22,500	10,200
5/8	16	1 5/8	5 1/4	10 1/2		58,700	26,600	47,900	21,700	33,900	15,400
3/4	20	1 7/8	6	12		91,700	41,600	74,900	3,400	53,000	24,000
7/8	22	2 1/4	8	16		110,900	50,250	90,600	41,050	64,000	29,050
1	25	2 1/4	8	16		123,900	56,900	101,200	46,500	71,500	32,800
1 1/4	32	2 3/4	9	16		187,900	85,200	153,400	69,600	108,400	49,200

Dimensions are approximate. Triple Sling Chains are available in other combinations
WARNING: Do not exceed working load limit.